



TECHNICAL DATA:


Not easily accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	4,04 x 4,12m
Device height:	3,20m
Minimum space:	7,48 x 7,06m
Falling area:	36,38m <sup>2</sup>
Critical fall height:	0,90m
Foundations depth:	-0,60m

The device according to EN 1176-1:2012  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

- Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
  - minimal thickness for loose particulate materials 200+100mm
  - synthetic surface according to critical fall height

Top view with falling area

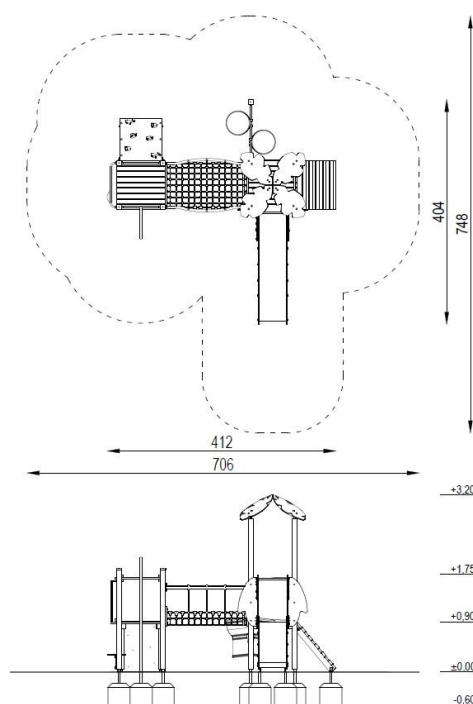

**COMPONENTS:**

Tower without roof, platform 0,90m	1 pc
Tower with roof, platform 0,90m	1 pc
Slide 0,90m	1 pc
Fireman's pole 0,90m	1 pc
Climbing wall 0,90m	1 pc
Entry gangplank 0,90m	1 pc
Rope bridge	1 pc
Balcony	1 pc
Little shop	1 pc
Little tam-tam drum	1 pc

**MATERIALS:**

Construction poles:	glued laminated pine timber, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel,
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Climbing walls:	shuttering waterproof plywood, climbing grips, based on resins
Drums:	rotomolded polypropylene
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.