




TECHNICAL DATA:


Device dimensions:	0,43m x 3,00m
Device height:	0,95m
Minimum space:	2,5 x 5,00m
Falling area:	11,64m ²
Critical fall height:	0,91m
Depth of foundations:	-0,60m

Top view with falling area

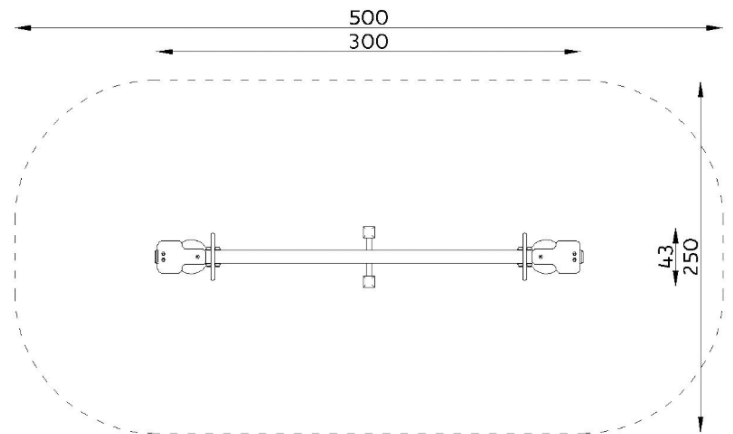

The device according to EN 1176-1:2012
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods.

- Safety surfaces:**
- turf/topsoil, sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 200+100mm
 - synthetic surface according to critical fall height

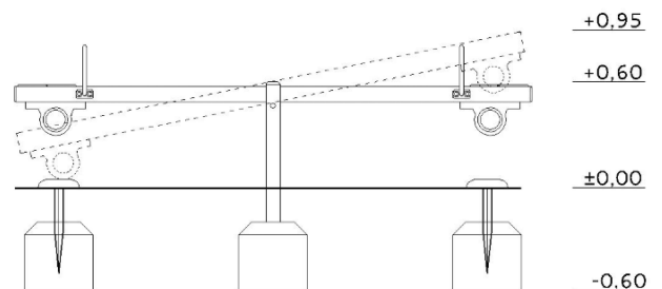

MATERIALS:

Construction poles:	steel profiles, galvanized
Beam of swing:	steel square profiles, galvanized, powder coated,
Steel elements:	galvanized steel, powder coated
Seats:	HDPE sheet
Bumper:	made of rubber granulate
Covers:	plastic
Foundations:	concrete class min. C12/15



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.