



TECHNICAL DATA:


Device with easily and not easily accessible elements, according to standard EN 1176-1:2017

Device dimensions: 6,93 x 4,26m
 Device height: 5,25m
 Minimum space: 9,58 x 7,73m
 Falling area: 50,15m²
 Critical fall height: 1,90m
 Foundations depth: -0,60m

The device according to EN 1176-1:2017
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods

Safety surfaces:
 - sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 200+100mm
 - synthetic surface according to critical fall height

Projection and device view

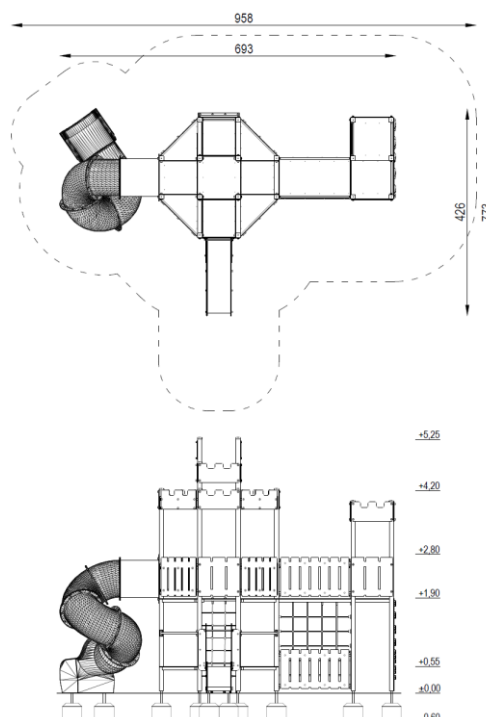

COMPONENTS:

Octagonal tower, platforms height 0.55 and 1.90m	1 pc
Rectangular tower, platform height 1.90m	1 pc
Narrow vertical linarium, height 1.90m	1 pc
Vertical wide linear, height 1.90m	1 pc
Vertical climbing wall, height 1.90m	1 pc
Fixed bridge	1 pc
Straight slide, height 0.55m	1 pc
Tubular slide, height 1.90m	1 pc

MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchor:	galvanized steel
Flat decorative elements:	HDPE sheets,
Platforms:	impregnated pinewood boards, with machined anti-skid surface,
Steel elements:	galvanized steel, powder coated
Surface of slope slide:	stainless steel,
Spiral slide:	polypropylene
Climbing walls:	shuttering waterproof plywood, climbing grips, based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate holder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.