




TECHNICAL DATA:

Nor easily accessible device,  
according to standard EN 1176-1:2017


Device dimensions:	4,85 x 6,17m
Device height:	3,20m
Minimum space:	7,85 x 9,65m
Falling area:	57,50m <sup>2</sup>
Critical fall height:	1,70m
Foundations depth:	-0,60m

Top view with falling area

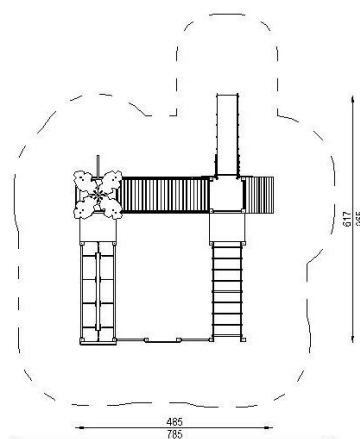

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

Safety surfaces: paved, grass, sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height

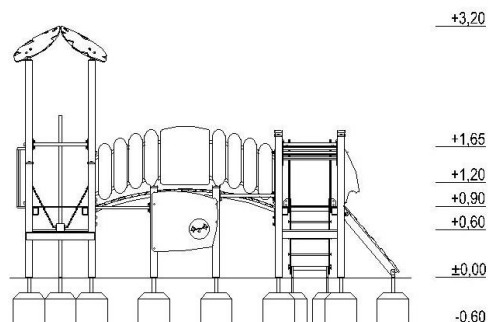

## COMPONENTS:

Tower without roof, platform 0,60m	2 pcs
Tower without roof, platform 0,90m	1 pc
Tower with roof, platform 0,90m	1 pc
Slope gangway 0,90m	1 pc
Slide 0,90m	1 pc
Fireman's pole 0,90m	1 pc
Horizontal ladder	1 pc
Arched bridge	1 pc
Movable bridge	1 pc
Flip tube	1 pc
Balcony	1 pc

## MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangway:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Horizontal ladder:	sides made of HDPE , rungs: stainless steel
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.