




TECHNICAL DATA:

Not easily accessible device,
according to standard EN 1176-1:2017


Device dimensions:	5,81 x 4,68m
Device height:	3,80m
Minimum space:	9,76 x 7,58m
Falling area:	59,65m ²
Critical fall height:	2,20m
Foundations depth:	-0,60m

Projection and device view

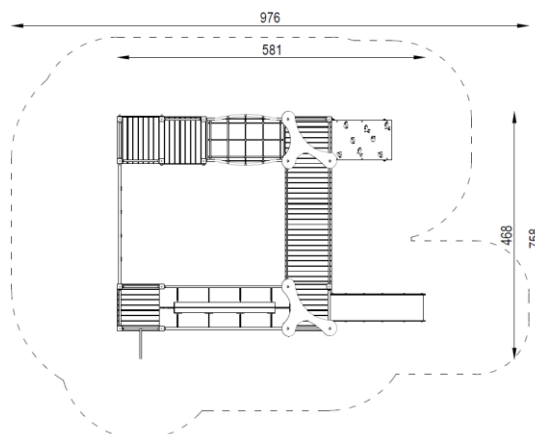

The device according to EN 1176-1:2012
Playground equipment and surfacing – Part 1:
General safety requirements and test methods.

- Safety surfaces:
- sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 300+100mm
 - synthetic surface according to critical fall height

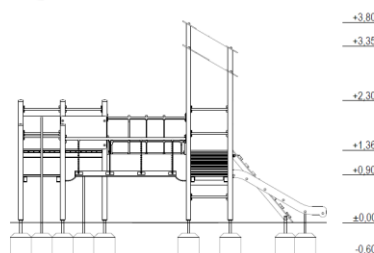

COMPONENTS:

Tower without roof, platform 0,90m	1 pc
Tower without roof, platform 1,36m	2 pcs
Tower with roof, platform 0,90m	1 pc
Tower with roof, platform 1,36m	1 pc
Slope climbing wall 1,36m	1 pc
Vertical ladder	1 pc
Slide 0,90m	1 pc
Fireman's pole 0,90m	1 pc
Rope bridge	1 pc
Slope bridge	1 pc
Movable bridge	1 pc
Vertical rope net	1 pc

MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel, calibrated
Surface of slide:	stainless steel
Climbing walls:	shuttering waterproof plywood, climbing grips, based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.