

TECHNICAL DATA:

Not easily accessible device, according to standard EN 1176-1:2017


Device dimensions: 6,74 x 5,23m Device height: 3,70m Minimum space: 10,68 x 8,23m Falling area: 67,11m² Critical fall height: 2,20m Foundations depth: -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing - Part 1: General safety requirements and test methods

Safety surfaces:

- sand, gravel, bark, synthetic surface minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

Top view with falling area

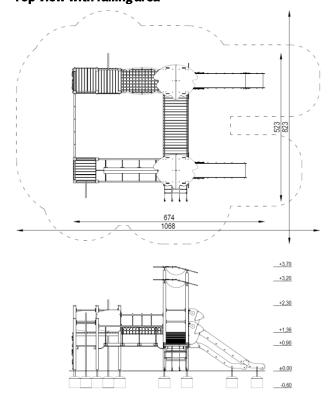

COMPONENTS: MATERIALS: Tower without roof, platform 0,90m 1 pc Construction poles: steel square profiles, galvanized, Tower without roof, platform 1,36m 2 pcs powder coated in gray Tower with roof, platform 0,90m 1 pc Flat decorative elements: HDPE sheets Tower with roof, platform 1,36m 1 pc Platforms: waterproof plywood, with anti-slip Vertical climbing wall 1,36m 1 pc layer, based on steel structure Entry rope net 0,90m 1 pc Steel elements: galvanized steel, powder coated Vertical ladder 2 pcs Surface of slide: stainless steel Slide 0,90m 1 pc Climbing walls: waterproof plywood, Slide 1,36m 1 pc climbing grips based on resins Fireman's pole 0,90m 1pc polypropylene braided with a steel, Ropes: Fireman's pole 1,36m 1 pc interconnected by plastic fasteners Rope bridge 1 pc Caps: plastic Slope bridge 1 pc Mobile bridge 1 pc Foundations: concrete min. C12/15 standard Vertical rope net 1 pc



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.