




TECHNICAL DATA:

Not easy accessible device,
according to standard EN 1176-1:2017


Device dimensions:	8,29 x 6,17m
Device height:	4,00m
Minimum space:	10,55 x 9,57m
Falling area:	64,83m ²
Critical fall height:	2,00m
Foundations depth:	-0,60m

Top view with falling area

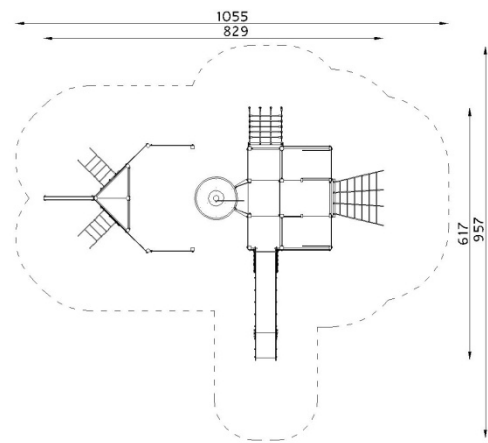

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces: sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

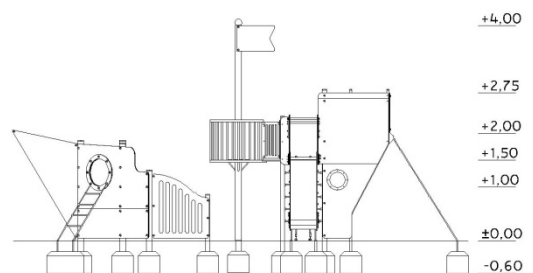

COMPONENTS:

Tower without roof, platform 1,50m:	1 pc
Tower with roof, platform 0,20m:	1 pc
Prow, 100mc	1 pc
Ship's mast 1,50m:	1 pc
Window with porthole	4 pcs
Stern deck 2,00m	1 pc
Angled ladder 1,00 m	2 pcs
Vertical ladder	3 pcs
Slide 1,50m:	1 pc
Angled rope net 1,50m	1pc
Angled rope net 2,00m	1pc

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets,
Platforms, gangways:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slope slide:	stainless steel,
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.