



TECHNICAL DATA:



Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	9,82 x 6,24m
Device height:	3,75m
Minimum space:	13,75 x 9,65m
Falling area:	62,77m ²
Critical fall height:	1,36m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Projection and device view

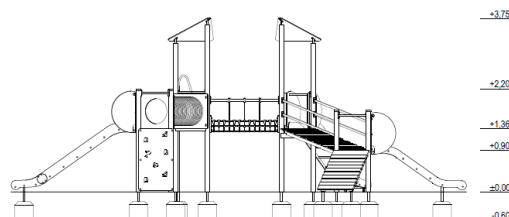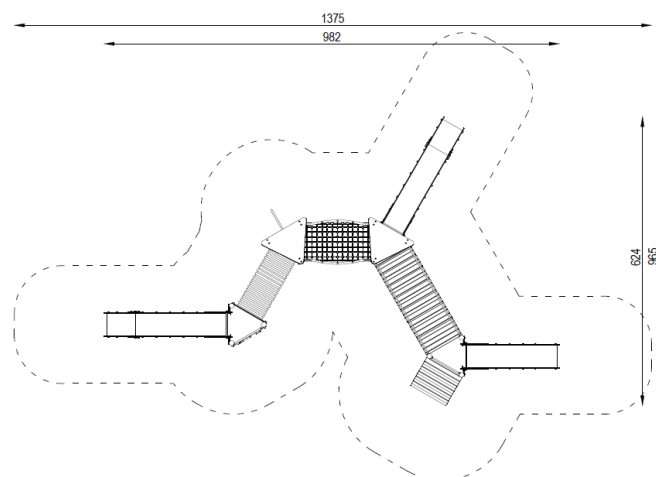

COMPONENTS:

Triangular tower with roof, platform 1,36m	1 pc
Triangular tower with roof, platform 0,90m	1 pc
Triangular tower without roof, platform 1,36m	1 pc
Triangular tower without roof, platform 0,90m	1 pc
Entry gangplank, height 0,90m	1 pc
Vertical climbing wall, height 1,36m	1 pc
Slide, height 1,36m	2 pcs
Slide, height 0,90m	1 pc
Fireman's pole, height 1,36m	1 pc
Rope bridge	1 pc
Tunnel passage	1 pc
Slope bridge	1 pc

MATERIALS:

Construction poles:	galvanized steel pipes, powder coated in gray
Flat decorative elements:	HDPE sheets
Platforms:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slope slide:	stainless steel
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Climbing walls:	waterproof plywood, climbing grips based on resins
Tunnel:	PVC pipe fastened to HDPE boards
Caps:	plastic
Foundations:	concrete min. C12/15 standard



GRUPA SATERNUS S. A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S. A. reserves all rights to protect copyright
Under the Act of February 4, 1994 on Copyright and Related Rights
(Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.