

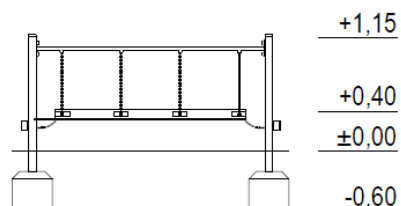
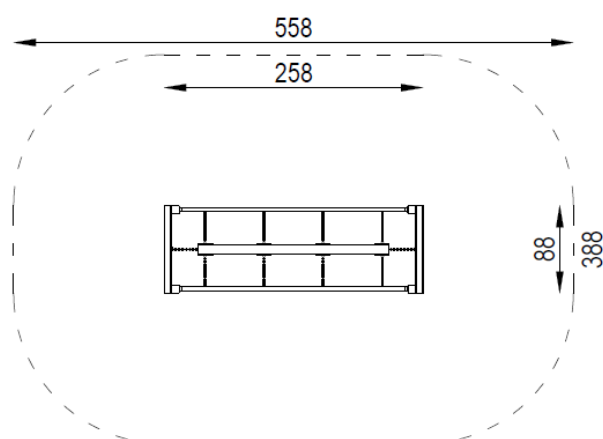

TECHNICAL DATA:

Easily accessible device,
according to standard EN 1176-1:2017

Device dimensions: 2,58 x 0,88m
 Device height: 1,15m
 Minimum space: 5,58 x 3,88m
 Falling area: 19,71m²
 Critical fall height: 0,40m
 Foundations depth: -0,60m

The device according to EN 1176-1:2017
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods

Safety surfaces:
 - turf/topsoil, sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 200+100mm
 - synthetic surface according to critical fall height

Top view with falling area


COMPONENTS:

Suspended balance beam 1 pc

MATERIALS:

Construction poles: steel square profiles, galvanized, powder coated in gray
Beam: impregnated pinewood boards, with machined anti-skid surface
Anchors: galvanized steel
Steel elements: galvanized steel, powder coated
Chain: calibrated, made of galvanized steel
Caps: plastic
Foundations: concrete min. C12/15 standard



GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright
Under the Act of February 4, 1994 on Copyright and Related Rights
(Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.