



TECHNICAL DATA:



Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	8,72 x 6,92m
Device height:	2,55m
Minimum space:	10,23 x 10,29m
Falling area:	82,32m ²
Critical fall height:	2,20m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

- Safety surfaces:
- sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 300+100mm
 - synthetic surface according to critical fall height

Top view with falling area

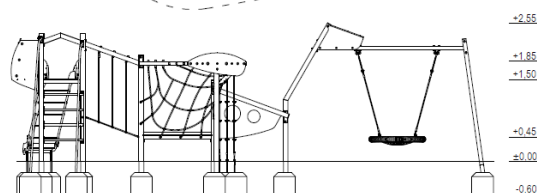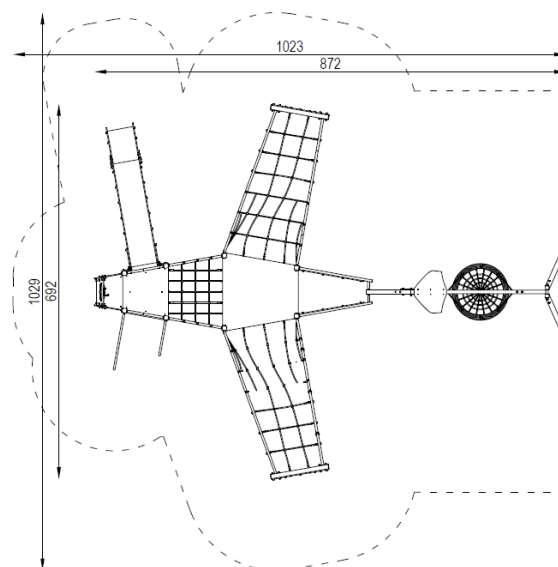

COMPONENTS:

Platform, height 1,50m	1 pc
Platform, height 0,45m	1 pc
Ladder, height 1,50m	1 pc
Slide, height 1,50m	1 pc
Fireman's pole, height 1,50m	1 pc
Fireman's pole with ladder, height 1,50m	1 pc
Rope bridge	1 pc
Rope net "wing"	2 pcs
Swing "bird's nest"	1 pc
Panel "cabin" with light module	1 pc
Panel "windows"	2 pcs
Panel "fin"	1 pc

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Flat decorative elements:	HDPE sheets
Platforms:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Climbing walls:	waterproof plywood, climbing grips based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Seat "nest":	made of polypropylene ropes, with a steel braid
Light module:	maintenance-free complex module
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.