


TECHNICAL DATA:

Easily accessible device,
according to standard EN 1176-1:2017


Device dimensions:	3,54 x 1,47m
Device height:	1,95m
Minimum space:	6,85 x 4,42m
Falling area:	22,24m ²
Critical fall height:	0,90m
Foundations depth:	-0,60m

Top view with falling area

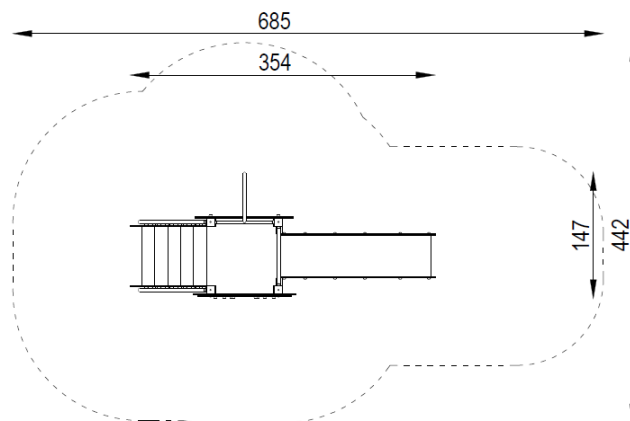

The device according to EN 1176-1:2012
Playground equipment and surfacing – Part 1:
General safety requirements and test methods.

Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

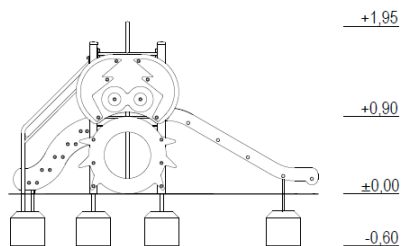

COMPONENTS:

Tower without roof, platform height 0,90m	1pc
Stairs, height 0,90m	1pc
Slide, height 0,90m	1pc
Fireman's pole, height 0,90m	1pc
Tunnel passage	1pc

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangway:	waterproof plywood, with anti-slip layer, based on steel structure (alternatively: anti slip HPL)
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Tunnel:	PVC pipe fastened to HDPE boards
Screws, bolts:	stainless steel
Caps:	plastic
Foundations:	concrete min. C12/15 standard



GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.