



TECHNICAL DATA


Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	5,25 x 2,48m
Device height:	5,50m
Minimum space:	7,66 x 5,45m
Falling area:	32,00m ²
Critical fall height:	2,50m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

- Safety surfaces:
- sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 300+100mm
 - synthetic surface according to critical fall height

Projection and device view

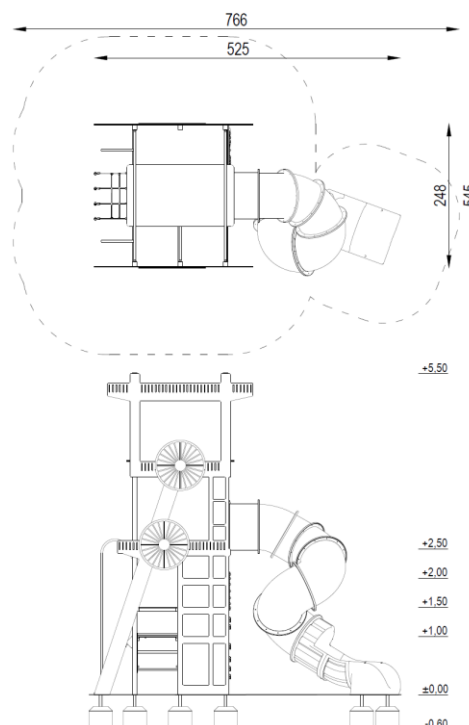


COMPONENTS:

„Shaft” tower, platforms height 1,00-2,50m	1 set
Roofed viewing platform	1 pc
Entry rope net, height 1,00m	1 pc
Vertical ladder, height 1,50m	2 pcs
Spiral slide, height 2,50m	1 pc
Fireman's pole, height 1,50m	2 pcs
Fireman's pole, height 1,00m	1 pc
Vertical climbing wall	1 pc

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Anchors:	galvanized steel
Platforms:	waterproof plywood, with anti-slip layer, based on steel structure
Flat decorative elements:	HDPE sheets, aluminum net
Spiral slide:	rotomolded plastic
Climbing walls:	polycarbonate, climbing grips based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard

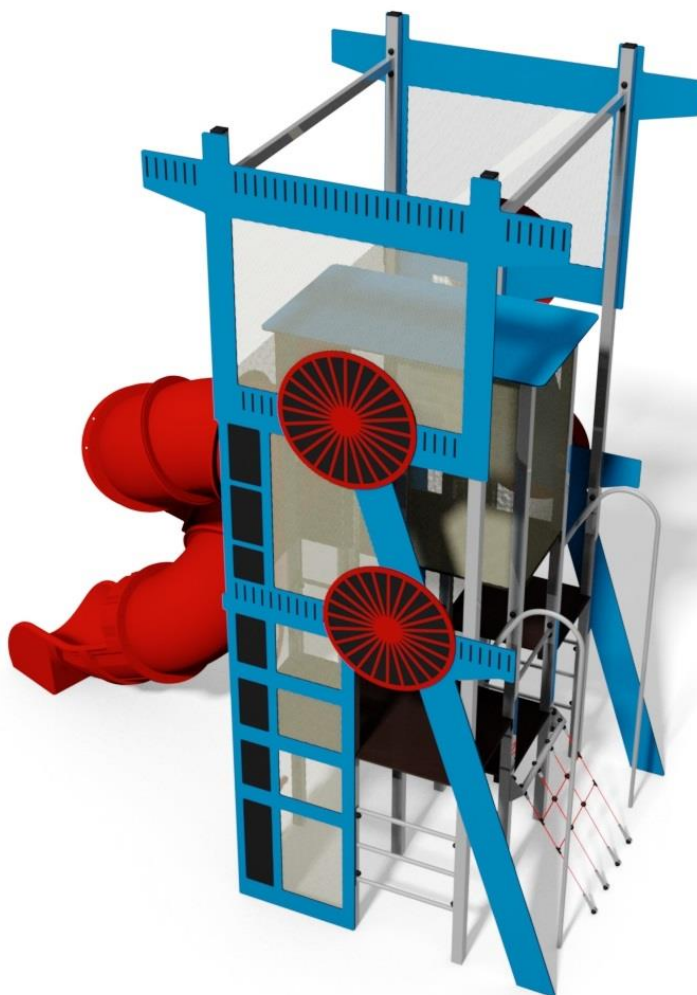

GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate holder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.