




TECHNICAL DATA:

Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	10,29 x 4,53m
Device height:	4,00m
Minimum space:	13,99 x 5,50m
Falling area:	61,00m ²
Critical fall height:	2,00m
Foundations depth:	-0,60m


Projection and device view

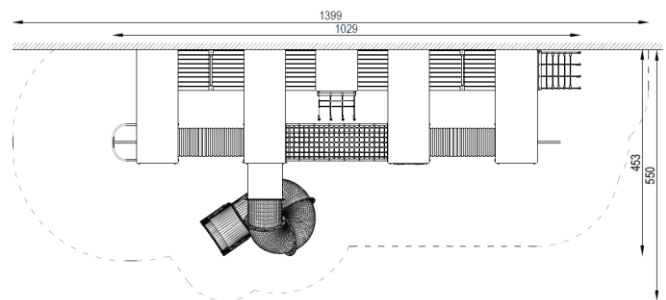

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:

- sand, gravel, bark, synthetic surface
- min. thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

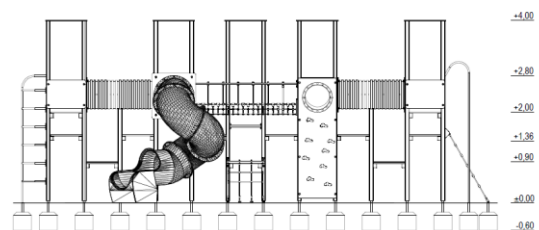


COMPONENTS:

Triple tower with roof	4 pcs
Single tower with roof	1 pc
Single tower without roof	6 pcs
Entry ropenet, height 0,90m	1 pc
Entry ropenet, height 1,50m	1 pc
Vertical climbing wall	1 pc
Fireman's pole with ladder	1 pc
Vertical ladder	6 pcs
Spiral slide, height 2,00m	1 pc
Fireman's pole, height 2,00m	1 pc
Tunnel passage	2 pcs
Rope bridge	1 pc

MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface
Steel elements:	galvanized steel, powder coated
Spiral slide:	rotomolded polypropylene
Tunnel:	PVC pipe fastened to HDPE boards
Climbing walls:	polycarbonate sheet, climbing grips based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard

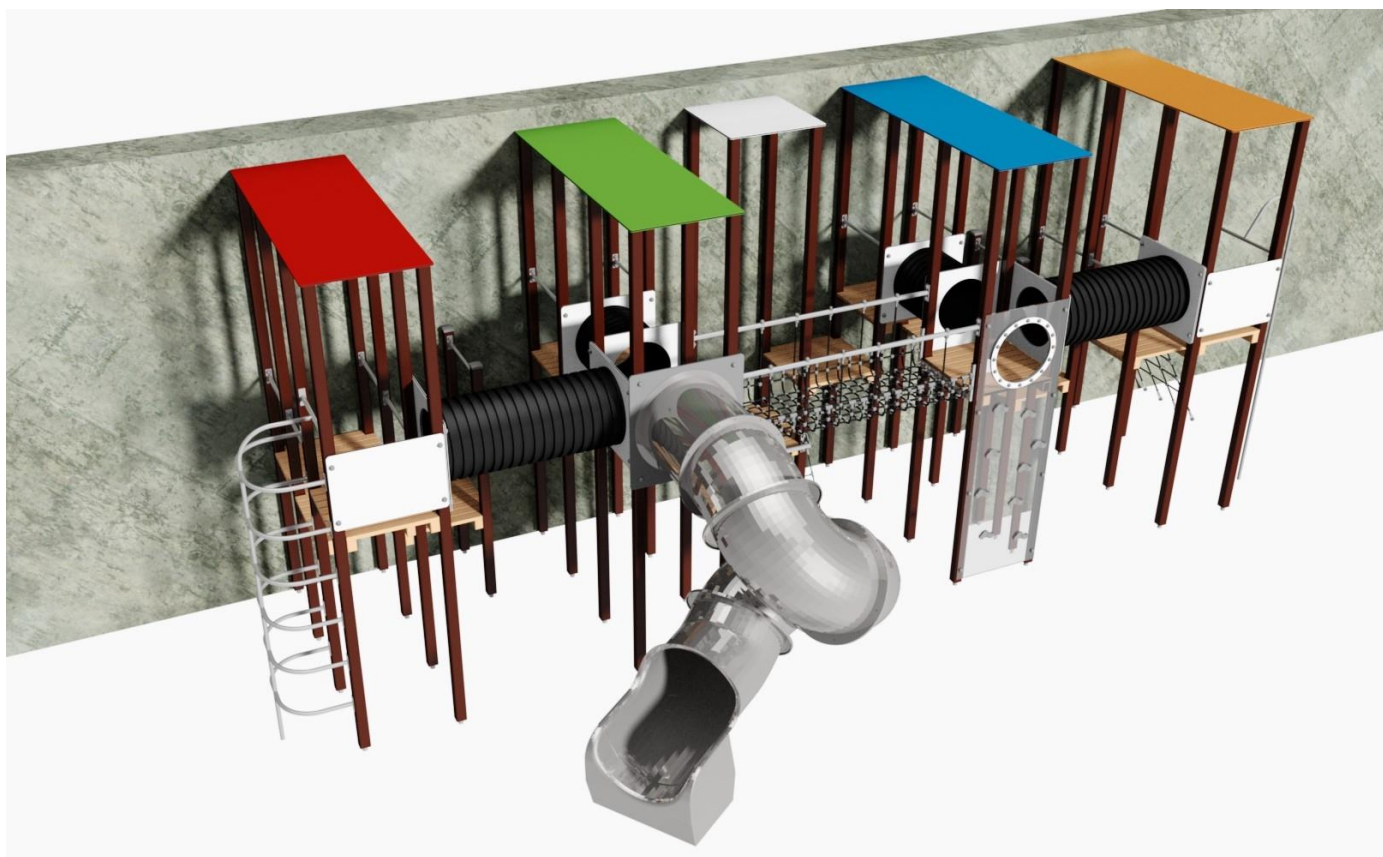

GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate holder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.