



TECHNICAL DATA:



Easy accessible device,
according to standard EN 1176-1:2017

Device dimensions:	4,24 x 4,27m
Device height:	3,00m
Minimum space:	7,66 x 7,66m
Falling area:	38,14m ²
Critical fall height:	0,90m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods.

Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

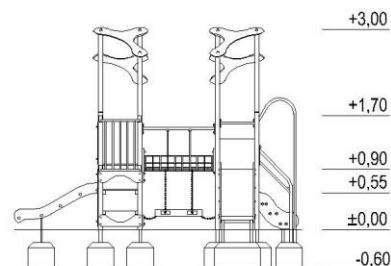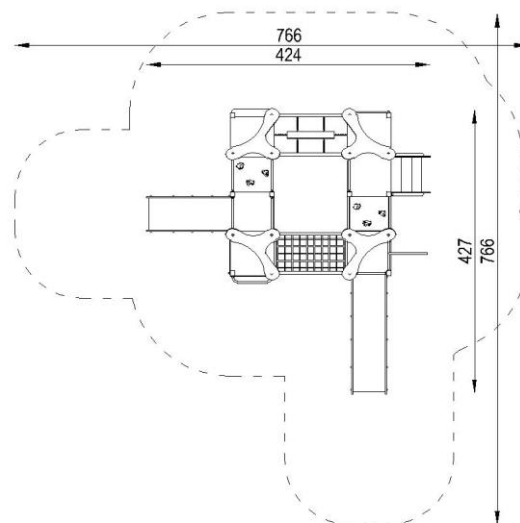

COMPONENTS:

Tower with roof, platform 0,30m	2 pcs
Tower with roof, platform 0,90m	2 pcs
Tower without roof, platform 0,55m	2 pcs
Climbing wall 0,55m	1 pc
Passage through the climbing wall	2 pcs
Slide 0,55m	1 pc
Slide 0,90m	1 pc
Fireman's pole 0,90m	1 pc
Rope bridge	1 pc
Movable bridge	1 pc
Hide	1 pc
Little shop	1 pc
Drawing board	1 pc

MATERIALS

Construction poles:	steel square profiles, galvanized, powder coated in gray
Flat decorative elements:	HDPE sheets
Platforms, gangways:	waterproof plywood, with non-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Surface of slide:	stainless steel
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Climbing walls:	shuttering waterproof plywood, climbing grips based on resins
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.