



### TECHNICAL DATA:


Easily accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	6,04 x 1,96m
Device height:	2,05m
Minimum space:	9,29 x 4,96m
Falling area:	32,82m <sup>2</sup>
Critical fall height:	0,90m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

Safety surfaces:  
- turf/topsoil, sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height

### Projection and device view

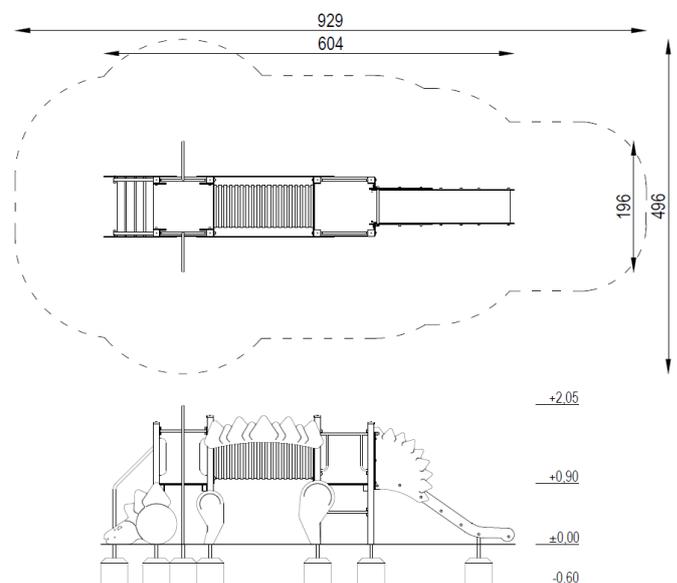

## COMPONENTS:

Tower without roof, platform 0,90m	2 pcs
Stairs, height 0,90m	1 pc
Vertical ladder	2 pcs
Slide, height 0,90m	1 pc
Fireman's pole, height 0,90m	2 pcs
Tunnel passage	1 pc
„Stegosaur” applications	1 set

## MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Flat decorative elements:	HDPE sheets
Platforms, gangways:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Tunnel:	PVC pipe fastened to HDPE boards
Caps:	plastic
Foundations:	concrete min. C12/15 standard



GRUPA SATERNUS S. A.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS S. A. reserves all rights to protect copyright  
Under the Act of February 4, 1994 on Copyright and Related Rights  
(Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.