



TECHNICAL DATA:



Easy accessible device,  
according to standard EN 1176-1:2017

Device dimensions: 6,40 x 5,43m  
 Device height: 2,70m  
 Minimum space: 9,85 x 8,42m  
 Falling area: 55,62m<sup>2</sup>  
 Critical fall height: 0,55m  
 Foundations depth: -0,60m

The device according to EN 1176-1:2017  
 Playground equipment and surfacing – Part 1:  
 General safety requirements and test methods.

Safety surfaces: paved, grass, sand, gravel, bark, synthetic surface  
 - minimal thickness for loose particulate materials 200+100mm  
 - synthetic surface according to critical fall height

Top view with falling area

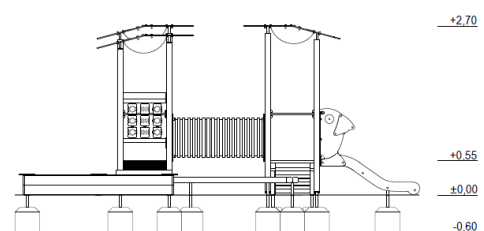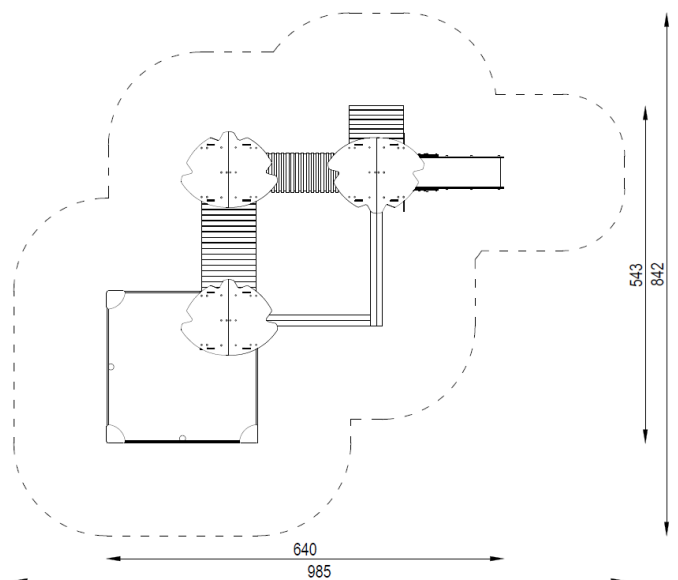

## COMPONENTS:

Tower with roof, platform 0,40m	1 pc
Tower with roof, platform 0,55m	2 pcs
Slope gangway 0,55m	1 pc
Slide 0,55m	1 pc
Slope bridge	1 pc
Tunnel passage	1 pc
Double balancing beam	1 pc
Drawing board	1 pc
Tic Tac Toe game	1 pc
Square sandbox	1 pc

## MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in gray
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms, gangway:	waterproof plywood, with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slide:	stainless steel
Tunnel:	PVC pipe, fastened to HDPE boards
Drawing board:	waterproof plywood, painted with blackboard paint
Tic tac toe:	screen-printed polypropylene rolls
Caps:	plastic
Foundations:	concrete min. C12/15 standard



GRUPA SATERNUS S.A.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright  
Under the Act of February 4, 1994 on Copyright and Related Rights  
(Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.AA  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.