




**TECHNICAL DATA:**

Easily accessible device,  
according to standard EN 1176-1 : 2017


Device dimensions:	2,10 x 2,40m
Device height:	2,40m
Minimum space:	7,40 x 2,40m
Falling area:	17,76m <sup>2</sup>
Critical fall height:	1,25m
Foundations depth:	-0,60m

**Projection and device view**

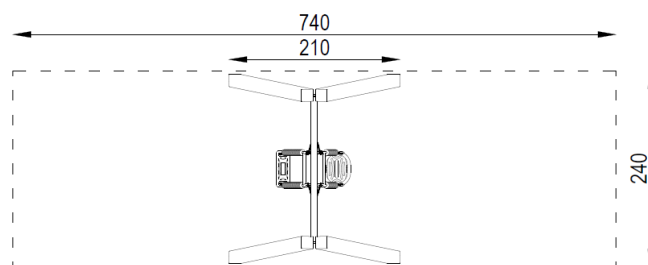

The device according to EN 1176-1 : 2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods.

Safety surfaces:  
- sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height



## MATERIALS:

Construction poles:	recycled material
Steel elements:	galvanized steel
Seat:	made of steel construction, coated with rubber
Chain:	stainless steel, calibrated
Caps:	plastic
Foundations:	concrete min. C12/15 standard



GRUPA SATERNUS S.A.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright  
under the Act of February 4, 1994 on Copyright and Related Rights  
(Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.