



TECHNICAL DATA:



Easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	2,55 x 0,13m
Device height:	2,15m
Minimum space:	5,54 x 3,11m
Falling area:	15,27m ²
Critical fall height:	0,60m
Foundations depth:	-0,60m

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- paved, turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Projection and device view

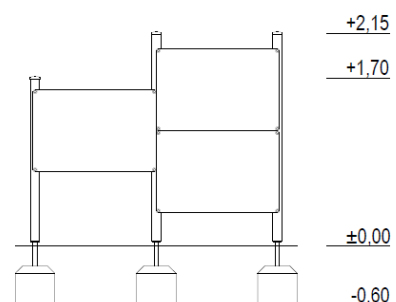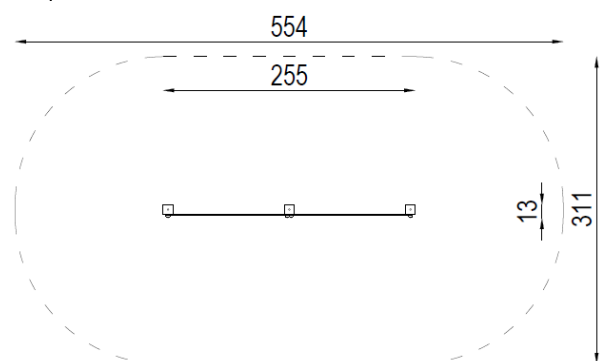

COMPONENTS:

Supporting structure 1 set
Drawing board 3 pcs

MATERIALS:

Construction poles: glued laminated pine timber,
varnish painted dark brown
Anchors: galvanized steel
Drawing board: waterproof plywood,
painted with blackboard paint
Caps: plastic
Foundations: concrete min. C12/15 standard



GRUPA SATERNUS S.A.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS S.A. reserves all rights to protect copyright
Under the Act of February 4, 1994 on Copyright and Related Rights
(Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS S.A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.