



TECHNICAL DATA:

Easily accessible device, according to standard EN 1176-1:2017

Device dimensions: 9,86 x 3,75m

Device height: 3,20m

Minimum space: 13,21 x 6,77m

Falling area: 60,34m²

Critical fall height: 0,90m


Foundations depth: -0,60m

The device according to EN 1176-1:2017 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

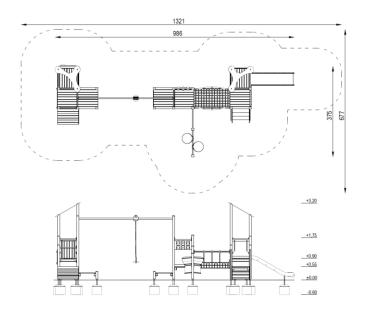

COMPONENTS:		MATERIALS:	
Tower without roof, platform 0,30m	2 pcs	Construction poles:	glued laminated pine timber,
Tower without roof, platform 0,55m Tower with roof, platform 0,90m	3 pcs 2 pcs	Anchors:	with machined anti-skid surface, 35mm thick
Entry gangway 0,55m	1 pc		
Entry stairs 0,55m	1 pc	with 35m	
Slide 0,90m	1 pc		
Rope bridge Railway	1 pc 1 pc	Steel elements: Chains:	galvanized steel, powder coated bath-galvanized steel
Flip tube	1 pc	Ropes:	polypropylene braided with a steel,
Balcony	1 pc	interconnected by plastic fasteners Surface of slide: stainless steel Drums: rotomoulded polypropylene	
Tic Tac Toe game	1 pc		
Little shop	1 pc	Tic tac toe:	Tic tac toe: polypropylene rolls, painted in the
Little Tam-Tam drum	1 pc	Cons	screen printing technique
		Caps:	plastic
		Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.