

TECHNICAL DATA:



Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	4,14 x 5,88m
Device height:	3,20m
Minimum space:	7,14 x 9,37m
Falling area:	54,57m ²
Critical fall height:	1,70m
Foundations depth:	-0,60m

The device according to EN 1176-1:2012
Playground equipment and surfacing – Part 1:
General safety requirements and test methods.

- Safety surfaces:
- sand, gravel, bark, synthetic surface
 - minimal thickness for loose particulate materials 200+100mm
 - synthetic surface according to critical fall height

Projection and device view

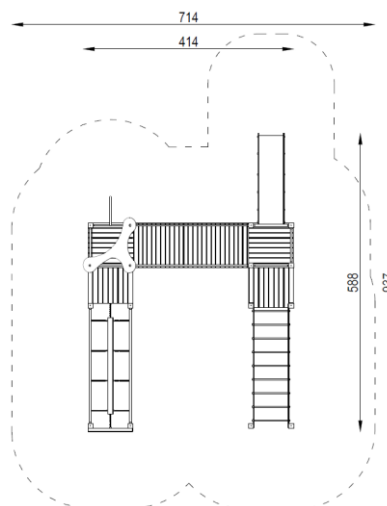

COMPONENTS:

Tower without roof, platform 0,60m	2 pcs
Tower without roof, platform 0,90m	1pc
Tower with roof, platform 0,90m	1pc
Vertical ladder	1pc
Slide 0,90m	1pc
Fireman's pole 0,90m	1pc
Horizontal ladder	1pc
Arch bridge	1pc
Movable bridge	1pc

MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchors:	galvanized steel
Flat decorative elements:	HDPE sheets
Platforms:	impregnated pinewood boards, with machined anti-skid surface
Steel elements:	galvanized steel, powder coated
Chains:	galvanized steel
Surface of slope slide:	stainless steel
Horizontal ladder:	sides made of HDPE, rungs: stainless steel
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.