

TECHNICAL DATA:


Not easily accessible device,
according to standard EN 1176-1:2017

Device dimensions:	Ø3,92m
Device height:	3,60m
Falling area:	Ø6,40m
Minimum space:	32,17m ²
Critical fall height:	1,58m
Foundations depth::	-0,60/-0,80m

The device according to EN 1176-1:2012
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

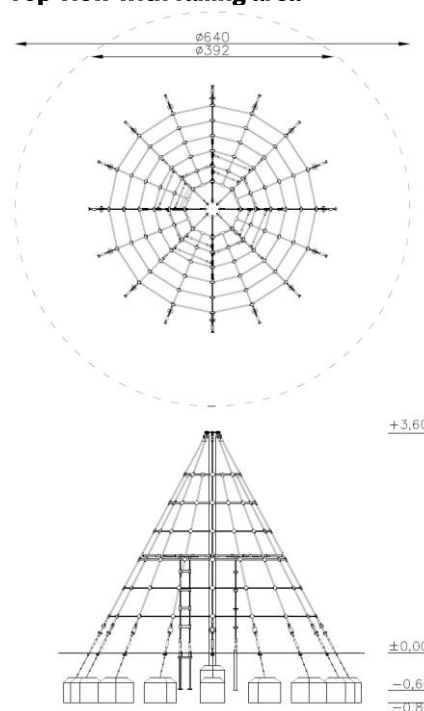

MATERIALS:

Construction pole:	steel profile, galvanized, powder coated
Rope net:	polypropylene braided with a steel, interconnected by plastic fasteners
Climbing elements:	plastic grips
Caps:	plastic
Mounting elements:	galvanized steel anchor, galvanized technical chain, galvanized turnbuckle
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.