



## TECHNICAL DATA:

Not easy accessible device, according to standard EN 1176-1:2017

Device dimensions: Ø9,30m

Device height: 6,50m

Falling area: Ø12,20m

Minimum space: 116,90m²

Critical fall height: 1,75m


Foundations depth: -1,10/-1,30m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods

## Safety surfaces:

- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

## Top view with falling area

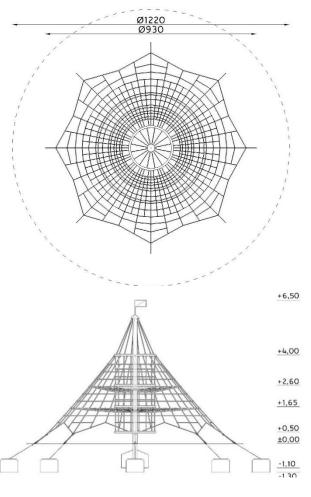

## **MATERIALS:**

Construction pole: steel profile, galvanized, powder coated

Rope net: polypropylene braided with a steel, interconnected by plastic fasteners

Hoop: steel hoop, galvanized, powder coated

Rungs: wooden cross-bars varnished, coated with glue paint

Caps: plastic

Foundations: concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.