

TECHNICAL DATA:

Device dimensions: $0,97 \times 0,47 \text{m}$

Device height: 1,00m

Minimum space: 3,54 x 3,44m

Critical fall height: 0,45m

Falling area: 10,20m²


Depth of foundations: -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods.

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Projection and device view

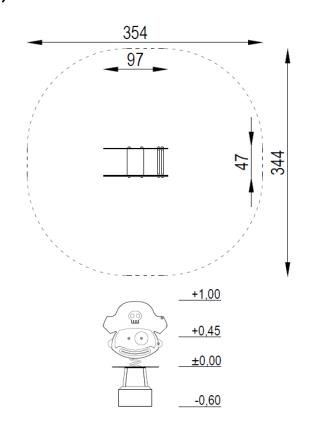

MATERIALS:

Decorative elements: HDPE sheet

Handles, leg supports: stainless steel pipes

Steel elements: galvanized steel

Spring: spring steel, galvanized and powder coated in red

Caps: plastic

Foundation base: steel structure

Foundations: concrete class min. C12/15



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.